

Transferring the


The Basics: Static Electrode

The Basics: Drum



After the pattern is set, the printer coats the drum with positively charged

The laser assembly moves in only one plane, horizontally. After each

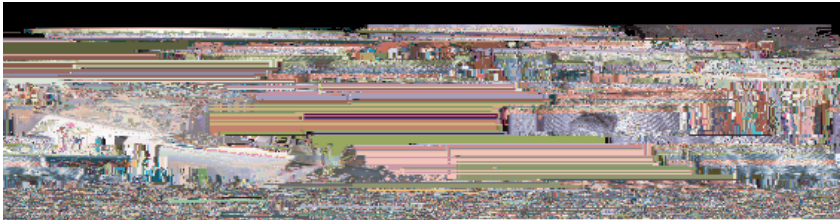

<http://www.printandclay.net>

When using decal paper print the image on the glossy side of the paper, Tape the image down (it tends to curl when sprayed) spray several light coats of lacquer or acrylic spray on the image, let dry 1hr to over night.

Soak in water, the image should release from the paper, slide onto your clay surface, gently smooth the decal from the center out, eliminating air bubbles (use a sponge)

Let dry thoroughly, and fire. There is no one set temperature to fire to, experiment on a variety of clays and glazed surfaces to find out what works for you.